

**TW022WA01 22 mm neodymium textile tweeter without face plate, 4 ohm**

TW022WA01 is a compact 22 mm neodymium tweeter for applications, where small size is important, while still requiring the highest level of performance.

**The best of two worlds?**

The design with 22 mm voice coil and wide surround caters for both applications that would normally require traditional ¾" tweeters and those, where 1" tweeters would usually be preferred.

**Innovation**

In order to keep distortion and resonance frequency low the TW022WA01 is designed around an external neodymium ring magnet in order to allow for a larger internal volume than that of traditional neodymium tweeters.



**FEATURES**

- 22 mm design for optimal compromise between on- and off-axis frequency response, resonance frequency, and power handling
- External ring neodymium magnet for lower resonance frequency and distortion
- Precision-coated textile diaphragm for improved consistency and high-frequency extension
- Vented voice coil former for reduced distortion and compression
- Copper-clad aluminium voice coil wire offering lower moving mass for improved efficiency and transient response
- Build-in cavities under dome/edge to equalize pressure - for lower distortion and lower resonance frequency
- High-stability ferro fluid for increased power handling
- Flexible lead wires for higher power handling and larger excursion
- Gold plated terminals to prevent oxidation and ensure long-term reliable connection

**NOMINAL SPECIFICATIONS**

Notes	Parameter	Value	Unit
	Nominal size	22	[mm]
	Nominal impedance	4	[ohm]
	Recommended frequency range	2.5 - 30	[kHz]
1, 4	Sensitivity, 2.83V/1m (average SPL in range 2 - 20 kHz)	88.5	[dB]
2	Power handling, short term, IEC 268-5, 2.5 kHz@12dB/oct.		[W]
2	Power handling, long term, IEC 268-5, 2.5 kHz@12dB/oct.		[W]
2	Power handling, continuous, IEC 268-5, 2.5 kHz@12dB/oct.	30	[W]
	Effective radiating area, S <sub>d</sub>	6.1	[cm <sup>2</sup> ]
3, 4, 6	Resonance frequency (free air, no baffle), F <sub>s</sub>	1,150	[Hz]
	Moving mass, incl. air (free air, no baffle), M <sub>ms</sub>	0.28	[g]
3	Force factor, Bxl	1.33	[N/A]
3, 4, 6	Suspension compliance, C <sub>ms</sub>	68	[µm/N]
3, 4, 6	Equivalent air volume, V <sub>as</sub>	3.6	[mlit.]
3, 4, 6	Mechanical resistance, R <sub>ms</sub>	1.33	[Ns/m]
3, 4, 6	Mechanical Q, Q <sub>ms</sub>	1.53	[-]
3, 4, 6	Electrical Q, Q <sub>es</sub>	4.1	[-]
3, 4, 6	Total Q, Q <sub>ts</sub>	1.11	[-]
4	Voice coil resistance, R <sub>DC</sub>	3.6	[ohm]
5	Voice coil inductance, L <sub>e</sub> (measured at 20 kHz)	36	[µH]
	Voice coil inside diameter	22	[mm]
	Voice coil winding height	1.6	[mm]
	Air gap height	2.5	[mm]
	Theoretical linear motor stroke, X <sub>max</sub>	±0.45	[mm]
	Magnet weight		[g]
	Total unit net weight excl. packaging	0.05	[kg]
3, 4, 5	K <sub>rm</sub>	2.5	[µohm]
3, 4, 5	E <sub>rm</sub>	1.14	[-]
3, 4, 5	K <sub>xm</sub>	3.0	[mH]
3, 4, 5	E <sub>xm</sub>	0.56	[-]

Note 1 Measured in infinite baffle.

Note 2 Tested in free air (no cabinet, no baffle).


Note 3 Measured using a semi-constant current source, nominal level 2 mA.

Note 4 Measured at 25 deg. C

Note 5 It is generally a rough simplification to assume that loudspeaker transducer voice coils exhibit the characteristics of an inductor. Instead it is a far more accurate approach to use the more advanced model often referred to as the "Wright empirical model", also used in LEAP-4 as the TSL model ([www.linearx.com](http://www.linearx.com)), involving parameters K<sub>rm</sub>, E<sub>rm</sub>, K<sub>xm</sub>, and E<sub>xm</sub>. This more accurate transducer model is described in a technical paper [here at our web site](#).


Note 6 Measured before burn in. The unit is not burned in before shipping.

**TW022WA01 22 mm neodymium textile tweeter without face plate, 4 ohm**

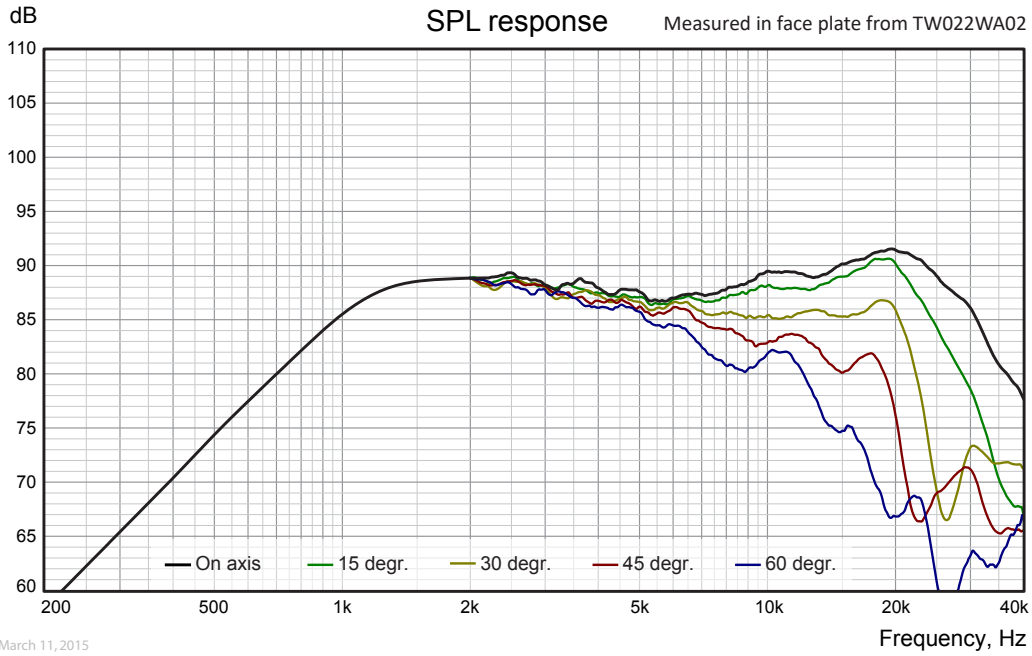


Measuring conditions, SPL  
 Driver mounting: Flush in infinite baffle, back side open (no cabinet)  
 Microphone distance: 1.0 m  
 Input signal: 2.83 VRMS stepped sine wave  
 Smoothing: 1/6 oct.

Measuring conditions, impedance  
 Driver mounting: Free air, no baffle, back side open (no cabinet)  
 Input signal: Stepped sine wave, semi-current-drive, nominal current 2 mA  
 Smoothing: None

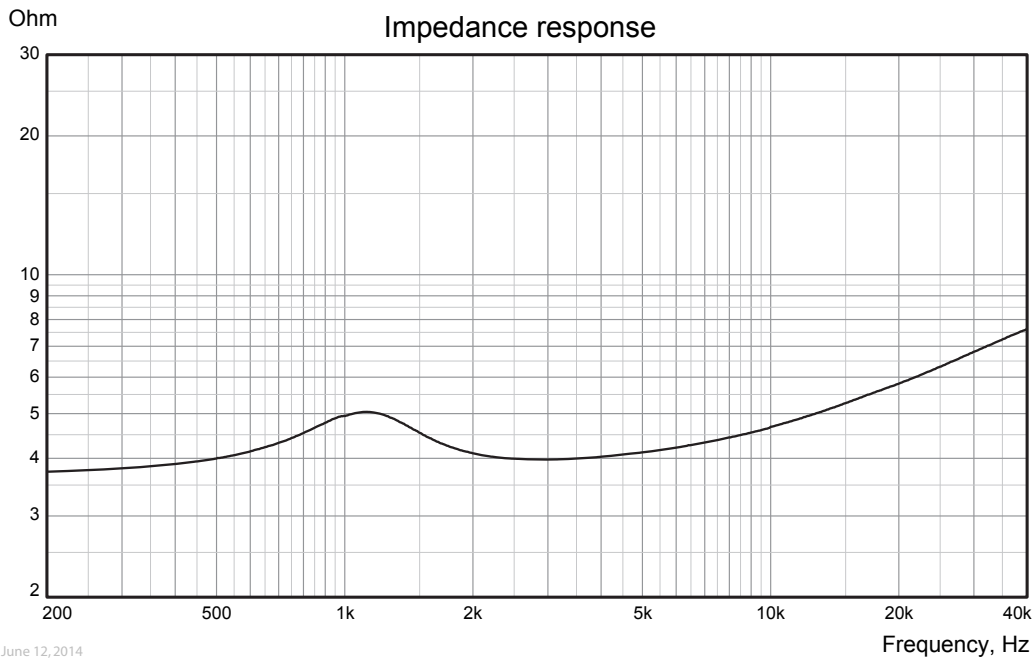


**TW022WA01 22 mm neodymium textile tweeter without face plate, 4 ohm**

**OUTLINE DRAWING (nominal dimensions, mm)**

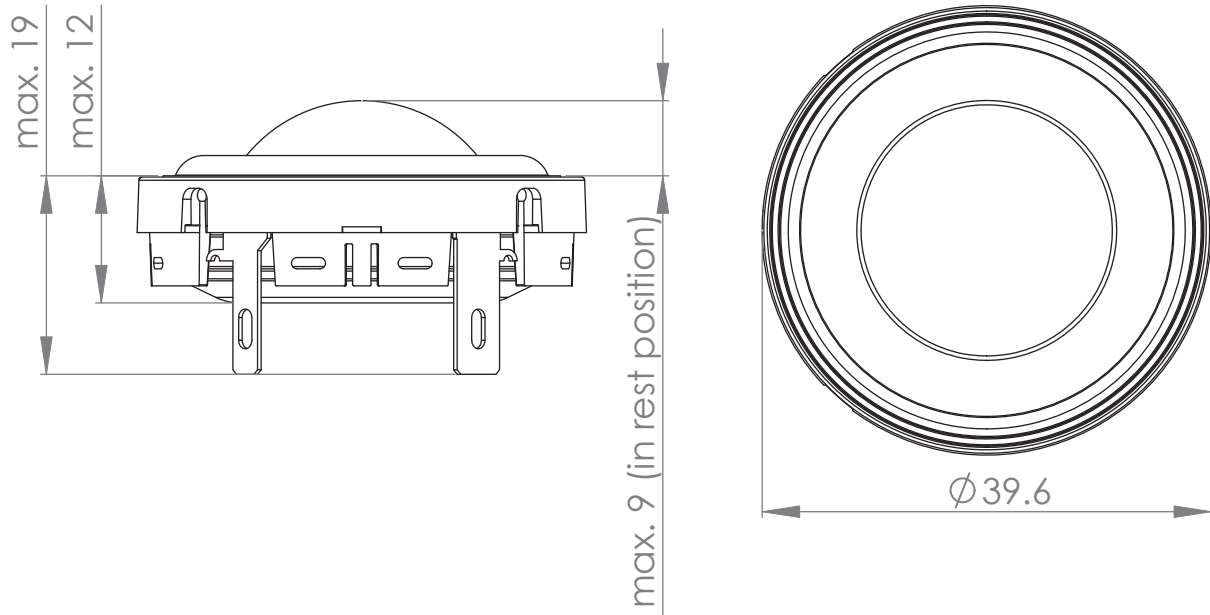

**CONNECTIONS**

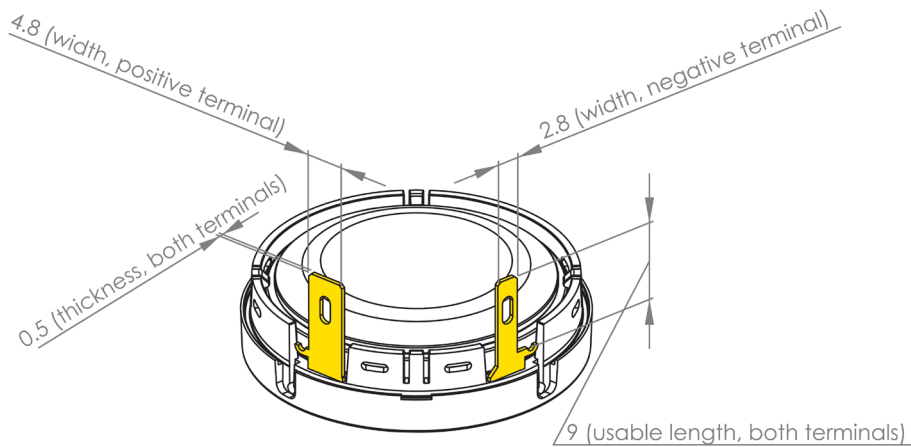

**PACKAGING AND ORDERING INFORMATION**

Part no. TW022WA01-01	Bulk packaging
-----------------------	----------------

Latest update: February 24, 2021